

Experimental Study on Partial Supersede of Bitumen by Waste Materials in Flexible Pavement

Sudha.G¹, Swetharani.A², Illakky.G³

Civil Department, ACET, Sankarapuram

gsudha735@gmail.com¹, aswetha940@gmail.com², illakkyagunasekaran24@gmail.com³

ABSTRACT

Now a day's disposal of waste materials has become issue and great concern for environmental engineering due to non-biodegradable characteristic and health hazards. In this world the various wastes are produced day to day life. The normal ending periods of flexible pavement is 15 years and rigid pavement is 30 years and maintenance work for flexible pavement is high. So we have to equalize the end period by using various waste materials. Disposal of waste is a menace and it is serious problems. Instead of disposing waste into landfills, it can be reused in flexible pavements. The tests were also performed to check the properties of the aggregates and bitumen. Some replacement percentages have been carried out based on trial and error methods. In our motive is to reduce the waste materials it is used for some purposed thing as well as to reduce the maintenance cost. If burning the waste or land filling the waste, it create air pollution and dumping the waste create hazardous to the groundwater, it pollute the water also so we are managing and creating the healthy and useful environment.

KEYWORDS: Replacement of waste materials, Stability, Grading tests for bitumen, Flow values, Cost analysis.

I. INTRODUCTION

The massive development of highway everywhere through the world was going ahead at present century. A good roadway in the foundation of a solid stable financial. In India the construction plays an important role. The construction of building, bridge, roads has some requirement and some design consideration with their standards and codal provision. Mostly two pavement can be used one is rigid and another one is flexible cost wise rigid is very high and life time of rigid is also high there is no maintenance work for rigid pavement. To reduce the cost and making economy by choosing the flexible pavement. We are adding the various waste materials like tire rubber and glass fibre to attain the higher strength Marshall stability test is the important to carryout nominal bitumen and combination of waste materials to measure the stability and flow value. By using waste materials. The developing issue of transfer of this material is an issue that requires coordination and duty by all gathering development of highway however such a utilization ought not to trade off the quality and execution of the roadway framework not being about a domain issue

II. OBJECTIVE OF THE STUDY

1. To study the grading for nominal bitumen
2. To introduce new innovative construction technical for flexible pavement.
3. To recycle the waste material to partial supersede of bitumen.
4. To improve strength for flexible pavement.

5. To reduce the cost of construction for flexible pavement.
6. To increase the stability and durability of the pavement
7. To know the stability and flow values for nominal and modified bitumen mix by conducting job mix.

III. LITERATURE REVIEW

Any study that is undertaken needs a sound background research, which helps in understanding the concepts involved and previous research work in area this particular chapter contains a gist of the relevant information that was collected in order to understand the research problem. Research papers published by researches in the area of bitumen and related areas have been referred to gain a thorough understanding of the various method adopted in going about this work. The following section with relevant research work in brief.

G.D.Airey, T.M.Singleton and A.C.Collop (Aug-2002)
“ Properties of polymer modified bitumen after rubber bitumen interaction” Investigated the use of rubber tire replacing bitumen. The result indicate the oxidative aging of the control mixture at high temperature has a lesser effects on the materials resistance to degradation 1 to 6h there is approximately a 300% increase in mass loss as compared with approximately 50% for the sample containing no rubber.

Panagiotis frantz (Aug 2004) “Crumb rubber bitumen interaction diffusion of bitumen in to

rubber” investigated the used of crumb rubber replacing bitumen. This method has been developed to study the diffusion of bitumen in to rubber. This allowed determination of the diffusion and solubility coefficients of bitumen in rubber from waste tires at 180°C. The test method was farther developed of a method employed in adhesion science for measurement of the diffusion and solubility coefficients of water in adhesive. The values of the diffusion and solubility coefficients were found to be of the same order as those report in the literature for water adhesive systems on the basis of current tests.

Parmeet Singh, Akashpathania (May 2018) “Modification of bitumen (using crumb rubber and MICA): A case on udhampur and ramban road” This study investigated the influence of crumb rubber and mica on the physical performance and mechanical properties of bitumen binder. Crumb rubber sieved through 700µm sieve. Both crumb rubber and mica impact hardness, strength and rigidity to the virgin bitumen. crumb rubber was blended in to bitumen in variation of 3%,5% and 7% by weight of sample mica was blended in the bitumen in variation of 35%,45% and 55% of the weight of sample . Since it is hilly region, design speed of the weight of sample. Since it is hilly region, design speed of the weight of the vehicle cannot exceed 70-80 kmph.

Davide Lo Presti (Dec 2013) “ Recycled tire rubber modified bitumen for road asphalt mixtures : A Literature review ” In terms of binder properties the main difference between these products are the viscosity and their storage stability viscosity for no agitation RTE –MB can range between 500 and 1000centipoises at 135°C much lower than the range of 1500-5000centipoise at 177.5°C with regards the stability no- agitation R TR- MB born with the idea of obtaining a RTR-MB modified binder comparable to the normal PMBS therefore on contrary to high viscosity RTR-MB it is usually possible to store its as conventional PMBS. Furthermore a recent study. Highlight that the storage temperature non agitated RTR-MB could be significantly decreased it compared to the need of the field blends to be stored in agitated tank from this point of view the terminal blends leads tanks to significant energy and money saving.

Prof.S.B.Patil (Dec- 2016) “Use of waste tire in road construction” This study investigated the modified bitumen and granulated (or) grand rubber (or) crumb rubber can be used as a portion of the fine stone aggregate a mixture of hot bitumen and crumb rubber derived from post –consumer waste or scrap tire. It is a material that can be used to seal crack and joints be applied as a chip seal coat and added to hot mineral aggregate to make a unique asphalt paving material.


Nithishkumar. K, Dr.HN.Rajakumara (May 2016) “Study of using rubber tire in construction of bitumen

our road” This study investigate the replaced in bitumen and aggregate should be achieve the stability and strengthening. This paper is intended to study the feasibility of the waste tire rubber as a blending material in bitumen and its mix which is used for road construction. The present study has been carried out in two stage. In the first stage basic property of bitumen is modified by adding the crumb rubber in 1-4%. In the second stage strength property of bitumen mix is determination by adding crumb rubber up to 1-4% with bitumen and replacing aggregate from 5-15%with waste rubber aggregate. The grade of bitumen used in study is VG30. The result property of VG30 bitumen is within the permissible limit by adding 0.4% rubber in bitumen the values of specific gravity, softening point flash & fire point are increase and ductility, penetration values are decrease but up to 1% addition of crumb rubber. Stability and flow of bitumen mi are within the limit up to 1% of crumb rubber. By replacing 5% aggregate by rubber aggregate the Marshall stability and flow values are within optimum limit.

IV METHODOLOGY

The proposed methodology is depicted a flowchart in the

Fig: 4.1

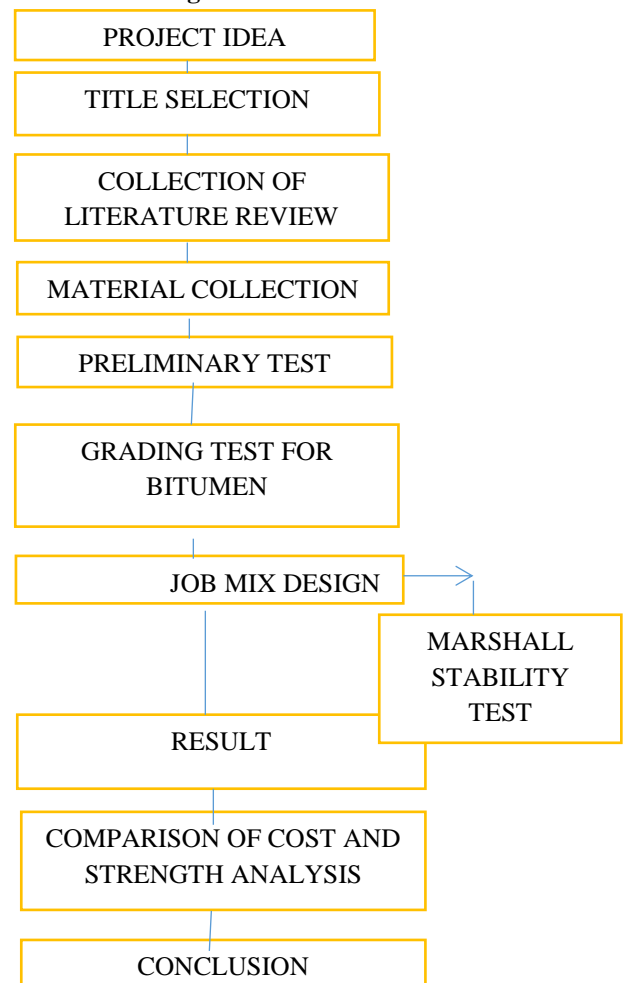

V. MATERIALS USED

The basic materials used for our project are Bitumen, Aggregate, Rubber tire, Glass fiber are the basic constituents of materials vary from place to place.



Glass fiber, Tire rubber

VI. PRIMARY TESTS ON MATERIALS

1. Specific gravity test on coarse aggregate

1.	BULK SPECIFIC GRAVITY	APPARENT SPECIFIC GRAVITY	EFFECTIVE SPECIFIC GRAVITY
----	-----------------------------	---------------------------------	----------------------------------

2. Impact test on aggregates = 17.7%

3. Water absorption = 0.55%

4. Combined aggregate grading (% passing)

We are using the aggregate size given the below

19mm aggregate CA1 = 21%, 6mm aggregate CA3 = 19%

13.2mm aggregate CA2 = 27%, Dust CS = 33%

Total = 100%

Combined grading result of coarse aggregate

SIEVE SIZE(mm)	CA ₁	CA ₂	CA ₃	CS	CEMENT	LIMITS	COMBINED GRADING
265mm	0%	0%	0%	0%	0%	0	0.00%
19mm	21.00%	27%	19%	33.00%	0%	100	100.00%
13.2mm	13.93%	26.95%	19%	33.00%	0%	90-100	92.88%
9.5mm	1.18%	20.83%	19%	33.00%	0%	70-88	74.01%
4.75mm	0%	9.34%	18.69%	32.98%	0%	53-71	61.01%

2.36mm	0%	6.65%	5.86%	32.35%	0%	42-58	44.85%
1.18mm	0%	6.06%	4.67%	23.29%	0%	34-48	34.03%
0.6mm	0%	0%	5.35%	22.51%	0%	26-38	27.85%
0.3mm	0%	0%	3.90%	14.23%	0%	18-28	18.13%
0.15m m	0%	0%	3.58%	8.85%	0%	12--20	12.43%
0.075m m	0%	0%	1.57%	3.50%	0%	04--10	5.07%

“The test conducted as per is 2386 part -1 (1963) conforms as per Morth V revision”

VII JOB MIX DESIGN

Weight of material for Bituminous Concrete mould

Various sizes of aggregate required

19mm aggregate - 21%

13.2mm aggregate - 27%

6mm aggregate - 19%

Dust - 33%

Total = 100%

Various percentages and weights of fine and coarse aggregate

As per the Morth 1200 is taken as BC mould:

$$19\text{mm (21\%)} = \frac{21}{100} \times 1200 = 252\text{gms}$$

$$13.2\text{mm (27\%)} = \frac{27}{100} \times 1200 = 324\text{gms}$$

$$6\text{mm (19\%)} = \frac{19}{100} \times 1200 = 228\text{gms}$$

$$\text{Dust (33\%)} = \frac{33}{100} \times 1200 = 396\text{gms}$$

Total fine and coarse aggregate = 1200gms

$$\text{Bitumen weight} = \frac{5.5}{100} \times 1200 = 66\text{gms}$$

(5.5% by weight of coarse and fine aggregate)

Total mix = Total fine and coarse+bitumen

$$= 1200 + 66 = 1266\text{gms}$$

5% of tire rubber with bitumen content

$$= 66 \times 5\% = 3.3\text{gms}(\text{tire rubber}), \\ 62.7\text{gms}(\text{bitumen})$$

Similar to the glass fiber

10% of tire rubber with bitumen content

$$= 66 \times 10\% = 6.6\text{gms}(\text{tire rubber}), \\ 59.4\text{gms}(\text{bitumen})$$

Similar to the glass fiber

Normal bitumen and modified bitumen in various materials with various percentages and we get various results in job mix test.

VIII RESULT AND CONCLUSION

1.Result of grading test on bitumen

S.No	tests	results	Rangs	IS code
1	Penetration test	96mm	Min 45mm	Is 1203
2	Ductility test	65mm	Min 40mm	Is 1203
3	Softening point test	48mm	Min 47mm	Is1205
4	Specific gravity	1.03	0.9 - 1.09	Is 1202

“The conforms as per IS73-2013 .(VG 30)”

Flexible pavement Properties ranges in mixture “As per Morth V Revision”

S.No	PROPERTIES	RANGE
1	Stability	Min 900kg
2	Flow value	2-4mm
3	% air voids	3-6

4	% Voids filled with bitumen (VFB)	65-75
5	% Voids in minerals aggregate	12-14

1. Result of Stability value for normal bitumen with waste materials


S.No	PERCENTAGE OF SAMPLE	STABILITY FOR TIRE RUBBER (kg)	STABILITY FOR GLASS FIBER (kg)
1	Optimum (0%)	920	920
2	bitumen with 5% Waste materials	1685	3494.2
3	bitumen with 10% Waste materials	1656	2758

2. Result of flow value for normal bitumen with waste materials

S. No	PERCENTAGE OF SAMPLE	FLOW VALUE FOR TIRE RUBBER (mm)	FLOW VALUE FOR GLASS FIBER (mm)
1	Optimum	3.3	3.3
2	Bitumen with 5% waste materials	6.2	7.3
3	Bitumen with 10% waste materials	7.3	6.9


S.No	PERCENTAGE OF SAMPLE	(Va) FOR TIRE RUBBER	(Va) FOR GLASS FIBER
1	Optimum	5.938	5.938
2	Bitumen with 5% waste materials	3.511	1.213
3	Bitumen with 10% waste materials	4.464	2.77

FLOW VALUE FOR NORMAL BITUMEN WITH VARIOUS PERCENTAGE WASTE MATERIALS

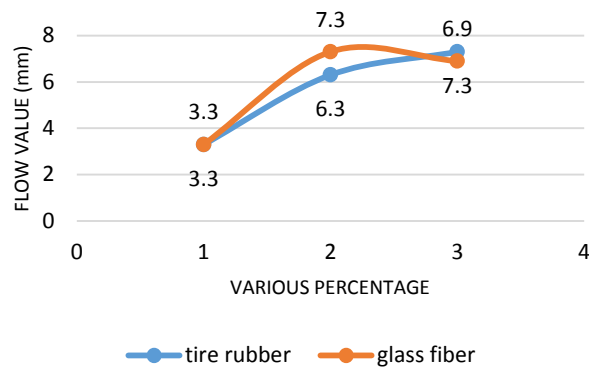


3. Result of bulk density for normal bitumen with waste materials

S. No	PERCENTAGE OF SAMPLE	BULK DENSITY OF COMPACTED MIXTURE FOR TIRE RUBBER (g/cc)	BULK DENSITY OF COMPACTED MIXTURE FOR GLASS FIBER (g/cc)
1	Optimum	2.170	2.170
2	Bitumen with 5% waste materials	2.226	2.347
3	Bitumen with 10% waste materials	2.204	2.330

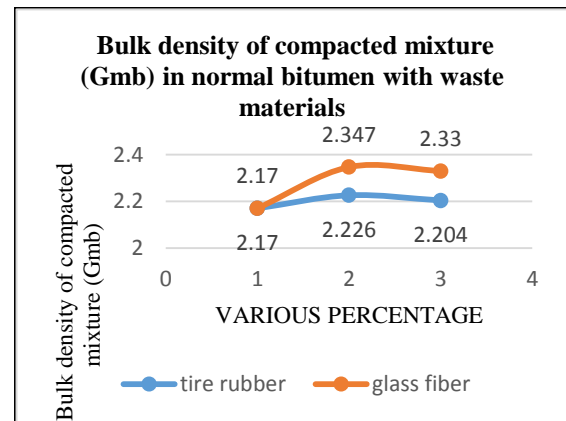


5.Result of Percent air voids in compacted mixture (Va)

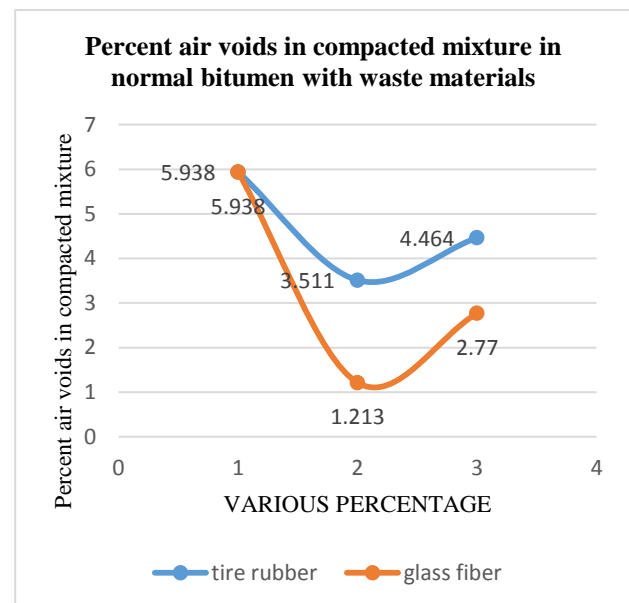

6.RESULT OF VOID IN MINERAL AGGREGATE IN NORMAL BITUMEN WITH WASTE MATERIALS

S.No.	PERCENTAGE OF SAMPLE	(VMA) FOR TIRE RUBBER	(VMA) FOR GLASS FIBER
1	Optimum	13.758	13.758
2	Bitumen with 5% waste materials	14.314	12.275
3	Bitumen with 10% waste materials	15.161	13.66

S. No.	PERCENTAGE SAMPLE	(VFB) FOR TIRE RUBBER	(VFB) FOR GLASS FIBER
1	Optimum	66.560	66.560
2	5% bitumen with waste materials	74.895	90.12
3	10% bitumen with waste materials	70.556	83.58

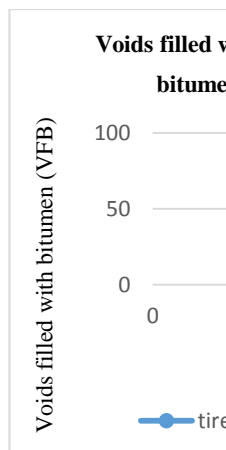

IX. COST ANALYSIS OF NORMAL PAVEMENT WITH WASTE MATERIALS

Government rate of normal flexible pavement with tire rubber

Normal flexible pavement of 10m² area quantity

= Rs 1815.85

Normal flexible pavement with 5% tire rubber

= Rs1760.35

Normal flexible pavement with 10% tire rubber

= Rs 1705.15

Private rate of normal flexible pavement with tire rubber

Normal flexible pavement of 10m² area quantity

= Rs 2265.63

Normal flexible pavement with 5% tire rubber

= Rs 2187.56

Normal flexible pavement with 10% tire rubber

= Rs 2109.45

Government rate of normal flexible pavement with glass fiber


Normal flexible pavement of 10m² area quantity

= Rs 1815.85

Normal flexible pavement with 5% glass fiber

= Rs 2347.99

Normal flexible pavement with 10% glass fiber

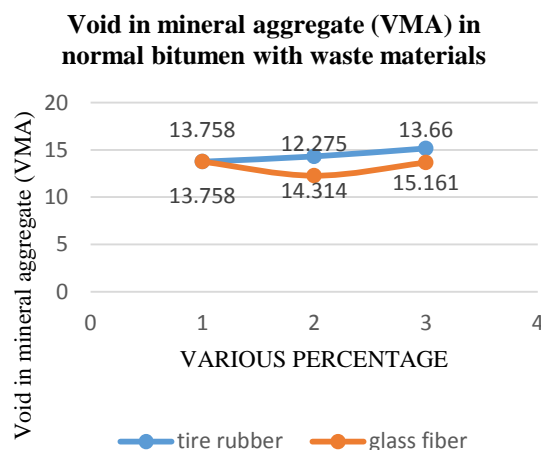

7. RESULT OF VOID FILLED WITH BITUMEN IN WASTE MATERIALS

= Rs 2880.43

Private rate of normal flexible pavement with tire rubber

Normal flexible pavement of 10m² area quantity

= Rs 2265.63

Normal flexible pavement with 5% glass fiber

= Rs 2775.2

Normal flexible pavement with 10% glass fiber

= Rs 3284.73

The various percentage shown in 0%, 5%,10% representative of 1,2,3 in the bar chart.

The government and private rate of normal bitumen with waste materials results in shown in bar chart fig 5,6

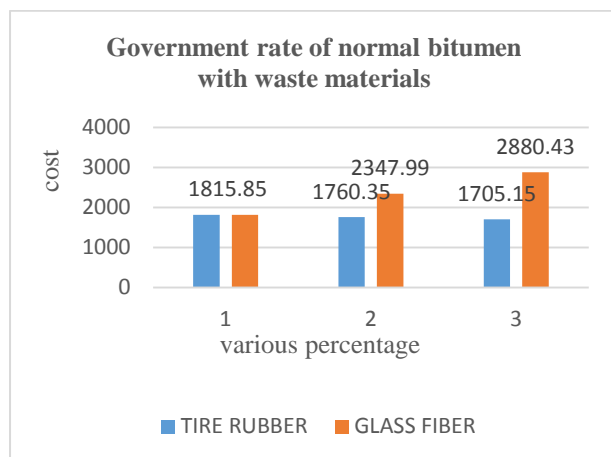


Fig 5 :The government rate of normal flexible pavement with waste materials

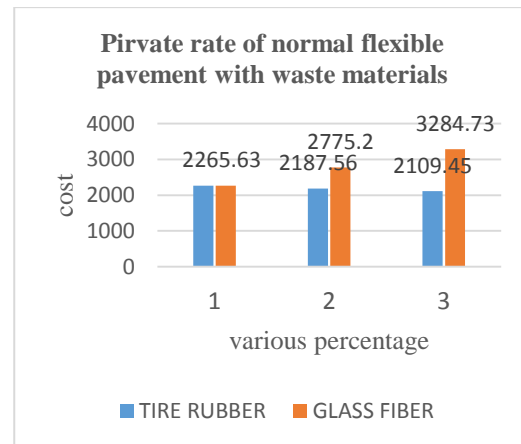


Fig 6: Private rate of normal flexible pavement with waste materials

CONCLUSION

We are concluded here for our project is to minimize the cost of the pavement, reduced the wastes at the same time to increase its durability, strength, smoothness and resist slippery action of the pavement and also to resist the failure. We are compared the normal bitumen and adding various waste material to check how the strength can be achieved and finding the stability and flow value of bitumen with tire rubber, glass fiber and it is the important test for the flexible pavement. The range of the bitumen for taking up to optimum, 5%, 10% of tire rubber and glass fiber. The main theme of our project is to reduce the cost, reduces the wastes, reduce the maintenance work. Our project only done by the waste materials such as tire rubber and glass fiber. These can take more time to degrade and it causes damages to human beings so it can be adding additives to the bitumen. By adding these additives it gives aesthetics, flexibility and increasing lifetime of the flexible pavement.

REFERENCES

1. Mohd rosli hainin(oct-2016) "Alternative Binders For Flexible Pavement", ARPJ Journal Of Engineering And Applied Sciences, Volume 11,No.20
2. Mohamed Abdel Raouf , Mohamed Metwally(oct-2010) "Development of non-petroleum based binder for using flexible pavements" IOWA STATE UNIVERSITY Institute of transportation
3. Amit Goel (aug-2014) "Emerging road materials and innovative applications", national conference on materials and their application in civil engineering, volume 10
4. K.Sri Harsha(Apr-2017) "Partial replacement of bitumen with glass fibre in flexible pavement",

- International journal of civil engineering and technology(IJCIET), volume 8, Issue: 4
5. Megha Deshmukh(Jul-2016) “Quality improvement practices in bituminous road construction”, International research journal of engineering and technology(IRJET), volume 03, Issue:7
 6. Melik Bekhiti (2014) “ Properties of waste tire rubber powder”, Engineering ,Technology & Applied Science Research, Volume 4 Issue :4
 7. Megha Deshmukh(Jul-2016) “Quality improvement practices in bituminous road construction”, International research journal of engineering and technology(IRJET), volume 03, Issue:7
 8. Mohd rosli hainin(oct-2016) “Alternative Binders For Flexible Pavement”, ARPN Journal Of Engineering And Applied Sciences, Volume 11,No.20
 9. Mohamed Abdel Raouf , Mohamed Metwally(oct-2010) “Development of non-petroleum based binder for using flexible pavements” IOWA STATE UNIVERSITY Institute of transportation
 10. Nithu(2017) “Utilization of rubber waste in construction of flexible pavement”, International journal of advanced research and development, volume 2, Issue:7